


# FLOW RATE GUIDE

## INTAKE TABLE

38 Range	Intake (l/s/m)
AR	3.00
PS	2.50
65 / 100 Range	
AR/TR	6.00
AA, MND, PS, PPS, PAS	4.00
All Ti	0.70
SD90	
10mm Holes	0.70
13mm Holes	1.00
12mm Open Slot	2.00
25mm Open Slot	4.00
SQ Drains	
SQ Ti All	0.70
SQ All ex Ti	1.00

## LATERAL FLOW

Channel	Lateral Flow Rate
38 x 40	0.4
65 x 40	0.7
65 x 25	0.4
100 x 20	0.4
100 x 30	0.6
100 x 40	0.9
120SCS x 20	0.4

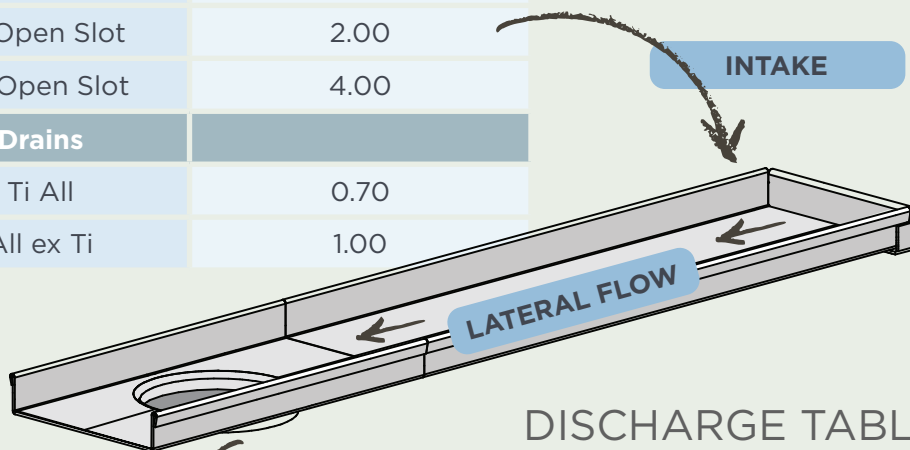

## DISCHARGE TABLE

Channel	Outlet DN40 Spigot l/s	Outlet 50 Spigot l/s	Outlet DN80 Spigot l/s	Outlet DN100 Spigot l/s
38x40	0.5	-	-	-
65x40	0.5	1.0	-	-
65x25	0.5	0.5	-	-
100x20	0.5	0.5	0.5	0.5
100x30	0.5	0.8	1.0	1.0
100x40	0.5	1.0	1.0	1.0
120SCSx20	0.5	0.5	0.5	0.5

**OUTLET DISCHARGE**

Visit [stormtech.com.au](https://stormtech.com.au) for detailed assembly and installation information.

SCAN QR CODE



### DISTRIBUTORS & STOCKISTS

+ To find a distributor near you, please visit our website or call our office.

**Stormtech** Pty Ltd | 22 Norfolk Avenue, South Nowra, NSW 2541 Australia |  
**Phone** 1300 653 403 | **Email** info@stormtech.com.au

### TECHNICAL INFORMATION

+ We provide product information and CAD files for download from our website.

